


CATHEDRAL DECK

Arches of interwoven bands dress the post as light flows down from the integral dome. Coordinates with matching Bollard 15449 TZT on page 77 and with matching Path light 15429 TZT on page 78.

15469 TZT - Textured Tannery Bronze™

Aluminum

12V T5 wedge base socket 

6.5-W(VA) 918X (17022) Xenon light source
Power usage at 12V AC input
VA MAX: 6.5-W(VA)

Optional: 4-W(VA) 901X (17021)


2W (18039-18041) see page 159
Compares up to 16W Xenon
Light distribution may be affected by location of sockets

72" of usable #18-2, SPT-1-W leads. Cable connector supplied

Stainless steel mounting bracket

N/A

Mounting Height	.6'	1'	2'	3'	4'	5'	6'	7'
6"	37.3	8.88	1.39	.34	.10	.03	-	-
12"	13.6	6.17	1.85	.74	.35	.18	-	-
30"	2.39	2.01	1.29	.79	.47	.30	-	-

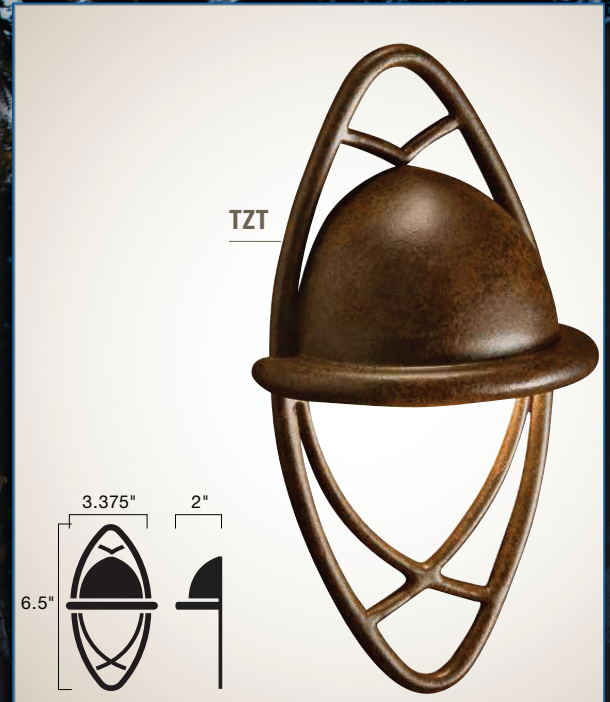

WT469

**EASILY CONVERTED
TO LED WITH THE
APPROPRIATE BULB**

LandLight
Enhance The Night

**Hybrid Deck &
Patio**

**Bring Outdoor Living Areas Into
The Light**

Enhance The Night - www.landlight.ca